


## Locking anchor

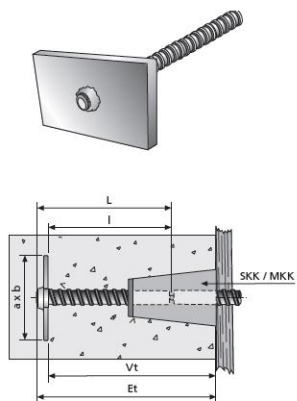

Suitable for use as a one-sided anchoring.  
Typically used for climbing formwork, scaffold anchors and thin-walled structures.

Consists of bendable and weldable B 15 threaded tie rod and plate (90 x 120 x 10 mm).

Vt = Anchoring depth  
Et = Installed depth

Rod failure at max. tensile load

Article description	Title of variant	Length mm	Thread	a mm	b mm	Et mm	L mm	t mm	Vt mm	Packaging piece/ metre/ metre by the metre/ bucket/ bag/ bundle/ box/ can	Weight kg/piece
18901016	Barrier anchor B 15	160	B 15	90	120	230	180	10	210	1 piece	1,120
18901099	Barrier anchor B 15	on request	B 15							1 piece	auf Anfrage