
COMAX® WU

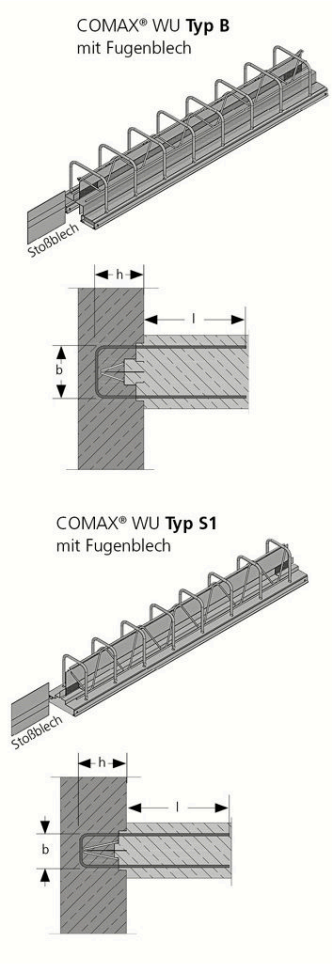

Comax® WU - The self-sealing reinforcement connection

Especially for the use of reinforcement connections in WU components
Reinforcement connection in combination with the proven shuttering elements from the COMAX® board system
A coated FB 120 metal waterstop is used as a sealant
Standard length 1.25 m; box height 30 mm
Comax® WU type B with metal water stop
h = min. 18 cm, b = min. 14 cm max. 53 cm
Comax® WU type S1 with metal water stop
h = min. 18 cm, w = min. 11 cm max. 22 cm

Comment to article
Bitte bei der Bestellung diese Maße angeben:
- BST Ø mm
- Bügelabstände e in cm
- h cm
- b cm
- l cm

COMAX® WU

Article description	Title of variant
412999999	Comax® WU Type B
30791634	AF 200 GK k=45 DF sheet welded with Comax incl. bumper plate, H = min. 18 cm
41148888	Comax® P 140 WU Type S1
41147777	AF Comax® P 140 FB B2
41168888	Comax® P 160 WU Type S1
41167777	AF Comax® P 160 FB B2
41198888	Comax® P 190 WU Type S1
41197777	AF Comax® P 190 FB B2
41228888	Comax® P 220 WU Type S1
41227777	AF Comax® P 220 FB B2
41248888	Comax® P 240 WU Type S1
41247777	AF Comax® P 240 FB B2