


## MTW 72 assembly carriage

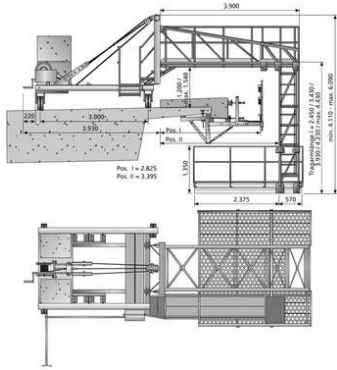

Permissible load:  
150 kg per m<sup>2</sup> or 6 people

For assembly and disassembly as well as for moving the MTW's 72, the boom and work platform are raised with the help of the winch (crank can be removed)

Protected access in the modular construction (walkway with safety ladder) traction:

- manually by site personnel
- Motorized vehicles
- Grab pull (manual)

Required accessories:

- Undercarriage elevation 10, 17 or 34 cm
- Stage covering made of perforated sheets
- Mast extensions 20, 50, 80 or 100 cm
- Outrigger shortening (additional frame) with low

Space requirements (insufficient lane width)

Own weight:

Assembly trolley approx. 25 kN (2.5 t) counterweight 45 kN (4.5 t)

For further information, see assembly and instructions for use

### Comment to article

Rent on request..

## MTW 72 assembly carriage

Article description	Title of variant	Packaging piece/ metre/ metre by the metre/ bucket/ bag/ bundle/ box/ can	Weight kg/piece
44250100	Assembly wagon MTW 72 with platform covering and access	1 piece	2,800
44282004	Ballast weight for MTW 72 (4 pieces required)	1 piece	1'125
44282007	Elevation 100 mm	1 piece	15,200
44282008	Elevation 170 mm	1 piece	23,2
44282010	Elevation 340 mm	1 piece	29
44357020	Mast extension 20 cm	1 piece	10,8
44357050	Mast extension 50 cm	1 piece	80,41
44357080	Mast extension 80 cm	1 piece	95,52
44357100	Mast extension 100 cm	1 piece	101,24
44357110	Boom shortening (additional frame)	1 piece	85