
# COMAX® P - Standard types

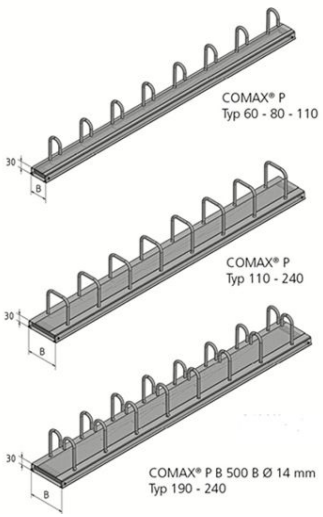


For faster execution of reinforcement joints

Standard length 1.25 m, height of the box: 30 mm
Significant advantages for the planner:
Excellent concrete bonding owing to perforated beaded strip
Significant advantages on the building site:
COMAX® P speeds up completion of shuttering owing to tear-off cover - no tools needed
COMAX® P - KOMO certified
COMAX® P - robust and very strong
COMAX® P is highly compatible with the BETOMAX® injection system
Practically no restriction of injected material
DIN 1045-1 states that the load capacity utilization of casings must not exceed 80%

Agenda:
B = Type/strip width/element width
l = Anchoring length
b = Stirrup width
h = Stirrup height
e = Stirrup spacing

**Technical data**
Agenda:
B = type/sheet width/element width
l = anchorage length
b = temple width
h = hoop height
e = stirrup distance

# COMAX® P - Standard types

| Article description | Typ/ Blechbreite mm | Comment/footnote on the variant | BSt Ø mm | Bracket spacing e in cm | b1 cm | h cm | lü cm | Packaging piece/pallet | Weight kg/metre |
|---|---|---|---|---|---|---|---|---|---|
| 41600815 | 60 | | 8 | 15 | 6 | 15 | 32 | 200 pieces/pallet | 1,740 |
| 41600820 | 60 | | 8 | 20 | 6 | 15 | 32 | 200 pieces/pallet | 1,560 |
| 41601015 | 60 | | 10 | 15 | 6 | 15 | 39 | 200 pieces/pallet | 2,970 |
| 41601020 | 60 | | 10 | 20 | 6 | 15 | 39 | 200 pieces/pallet | 2,410 |
| 41080825 | 80 | | 8 | 25 | 6 | 15 | 32 | 150 pieces/pallet | 1,690 |
| 41081010 | 80 | | 10 | 10 | 6 | 15 | 39 | 150 pieces/pallet | 4,180 |
| 41081215 | 80 | | 12 | 15 | 8 | 15 | 46 | 150 pieces/pallet | 4,690 |
| 41081220 | 80 | | 12 | 20 | 8 | 15 | 46 | 150 pieces/pallet | 3,700 |
| 41111210 | 110 | | 12 | 10 | 8 | 15 | 46 | 80 pieces/pallet | 7,790 |
| 41610815 | WH60 | | 8 | 15 | 8 | 15 | 32 | 200 pieces/pallet | 1,740 |
| 41610820 | WH60 | | 8 | 20 | 8 | 15 | 32 | 200 pieces/pallet | 1,470 |
| 41611015 | WH60 | | 10 | 15 | 8 | 15 | 39 | 200 pieces/pallet | 2,350 |
| 41611020 | WH60 | | 10 | 20 | 8 | 15 | 39 | 200 pieces/pallet | 1,910 |
| 41800825 | WH80 | | 8 | 25 | 8 | 15 | 32 | 150 pieces/pallet | 1,400 |
| 41801015 | WH80 | | 10 | 15 | 8 | 15 | 39 | 150 pieces/pallet | 3,100 |
| 41801210 | WH80 | | 12 | 10 | 8 | 15 | 35 | 150 pieces/pallet | 6,550 |
| 41801215 | WH80 | | 12 | 15 | 8 | 15 | 46 | 150 pieces/pallet | 3,850 |
| 41110815 | 110 | | 8 | 15 | 8 | 15 | 32 | 80 pieces/pallet | 3,510 |
| 41110820 | 110 | | 8 | 20 | 8 | 15 | 32 | 80 pieces/pallet | 2,890 |
| 41110825 | 110 | | 8 | 25 | 8 | 15 | 32 | 80 pieces/pallet | 2,640 |
| 41111015 | 110 | | 10 | 15 | 8 | 15 | 39 | 80 pieces/pallet | 5,420 |
| 41111020 | 110 | | 10 | 20 | 8 | 15 | 39 | 80 pieces/pallet | 4,340 |
| 41111215 | 110 | Not KOMO certified | 12 | 15 | 9 | 15 | 33 | 80 pieces/pallet | 7,740 |
| 41111220 | 110 | Not KOMO certified | 12 | 20 | 9 | 15 | 46 | 80 pieces/pallet | 6,040 |
| 41140815 | 140 | | 8 | 15 | 11 | 15 | 32 | 108 pieces/pallet | 3,550 |
| 41140820 | 140 | | 8 | 20 | 11 | 15 | 32 | 108 pieces/pallet | 3,090 |
| 41140825 | 140 | | 8 | 25 | 11 | 15 | 32 | 108 pieces/pallet | 2,830 |
| 41141010 | 140 | | 10 | 10 | 11 | 15 | 39 | 108 pieces/pallet | 7,560 |

# COMAX® P - Standard types

| Article description | Typ/ Blechbreite mm | Comment/footnote on the variant | BSt Ø mm | Bracket spacing e in cm | b1 cm | h cm | lü cm | Packaging piece/pallet | Weight kg/metre |
|---|---|---|---|---|---|---|---|---|---|
| 41141015 | 140 | | 10 | 15 | 11 | 15 | 39 | 108 pieces/pallet | 5,640 |
| 41141020 | 140 | | 10 | 20 | 11 | 15 | 39 | 108 pieces/pallet | 4,370 |
| 41141215 | 140 | | 12 | 15 | 11 | 15 | 46 | 108 pieces/pallet | 8,010 |
| 41141220 | 140 | | 12 | 20 | 11 | 15 | 46 | 108 pieces/pallet | 6,060 |
| 41160815 | 160 | | 8 | 15 | 13 | 15 | 32 | 72 pieces/pallet | 3,840 |
| 41160820 | 160 | | 8 | 20 | 13 | 15 | 32 | 72 pieces/pallet | 3,370 |
| 41160825 | 160 | | 8 | 25 | 13 | 15 | 32 | 72 pieces/pallet | 3,010 |
| 41161010 | 160 | | 10 | 10 | 13 | 15 | 39 | 72 pieces/pallet | 7,240 |
| 41161015 | 160 | | 10 | 15 | 13 | 15 | 39 | 72 pieces/pallet | 5,440 |
| 41161020 | 160 | | 10 | 20 | 13 | 15 | 39 | 72 pieces/pallet | 4,490 |
| 41161215 | 160 | | 12 | 15 | 13 | 15 | 46 | 72 pieces/pallet | 7,900 |
| 41161220 | 160 | | 12 | 20 | 13 | 15 | 46 | 72 pieces/pallet | 6,340 |
| 41190815 | 190 | | 8 | 15 | 16 | 15 | 32 | 72 pieces/pallet | 4 |
| 41190820 | 190 | | 8 | 20 | 16 | 15 | 32 | 72 pieces/pallet | 3,550 |
| 41190825 | 190 | | 8 | 25 | 16 | 15 | 32 | 72 pieces/pallet | 3,370 |
| 41191010 | 190 | | 10 | 10 | 16 | 15 | 39 | 72 pieces/pallet | 7,860 |
| 41191015 | 190 | | 10 | 15 | 16 | 15 | 39 | 72 pieces/pallet | 6,150 |
| 41191020 | 190 | | 10 | 20 | 16 | 15 | 39 | 72 pieces/pallet | 5,050 |
| 41191210 | 190 | | 12 | 10 | 16 | 15 | 46 | 72 pieces/pallet | 13,760 |
| 41191215 | 190 | | 12 | 15 | 16 | 15 | 46 | 72 pieces/pallet | 8,550 |
| 41191220 | 190 | | 12 | 20 | 16 | 15 | 46 | 72 pieces/pallet | 6,980 |
| 41220815 | 220 | | 8 | 15 | 19 | 15 | 32 | 48 pieces/pallet | 4,370 |
| 41220820 | 220 | | 8 | 20 | 19 | 15 | 32 | 48 pieces/pallet | 3 |
| 41220825 | 220 | | 8 | 25 | 19 | 15 | 32 | 48 pieces/pallet | 3,570 |
| 41221010 | 220 | | 10 | 10 | 19 | 15 | 39 | 48 pieces/pallet | 8 |
| 41221015 | 220 | | 10 | 15 | 19 | 15 | 39 | 48 pieces/pallet | 6,370 |
| 41221020 | 220 | | 10 | 20 | 19 | 15 | 39 | 48 pieces/pallet | 5,320 |
| 41221210 | 220 | | 12 | 10 | 19 | 15 | 46 | 48 pieces/pallet | 14,610 |
| 41221215 | 220 | | 12 | 15 | 19 | 15 | 46 | 48 pieces/pallet | 8 |
| 41221220 | 220 | | 12 | 20 | 19 | 15 | 46 | 48 pieces/pallet | 7 |
| 41240815 | 240 | | 8 | 15 | 21 | 15 | 32 | 48 pieces/pallet | 4,740 |
| 41240820 | 240 | | 8 | 20 | 21 | 15 | 32 | 48 pieces/pallet | 4,100 |
| 41240825 | 240 | | 8 | 25 | 21 | 15 | 32 | 48 pieces/pallet | 3,770 |
| 41241010 | 240 | | 10 | 10 | 21 | 15 | 39 | 48 pieces/pallet | 8,730 |
| 41241015 | 240 | | 10 | 15 | 21 | 15 | 39 | 48 pieces/pallet | 6,590 |
| 41241020 | 240 | | 10 | 20 | 21 | 15 | 39 | 48 pieces/pallet | 5,590 |
| 41241210 | 240 | | 12 | 10 | 21 | 15 | 46 | 48 pieces/pallet | 14,800 |
| 41241215 | 240 | | 12 | 15 | 21 | 15 | 46 | 48 pieces/pallet | 9,280 |
| 41241220 | 240 | | 12 | 20 | 21 | 15 | 46 | 48 pieces/pallet | 7,430 |
| 41191415 | 190 | | 14 | 15 | 16 | 15 | 54 | 60 pieces/pallet | 14,490 |

# COMAX® P - Standard types

| Article description | Typ/ Blechbreite mm | Comment/footnote on the variant | BSt Ø mm | Bracket spacing e in cm | b1 cm | h cm | lü cm | Packaging piece/pallet | Weight kg/metre |
|---|---|---|---|---|---|---|---|---|---|
| 41221415 | 220 | | 14 | 15 | 19 | 15 | 54 | 40 pieces/pallet | 14,830 |
| 41241410 | 240 | | 14 | 10 | 21 | 15 | 54 | 40 pieces/pallet | 22,720 |
| 41241415 | 240 | | 14 | 15 | 21 | 15 | 54 | 40 pieces/pallet | 14,880 |